


## Description of Specification (Interchangeable Type)

### Code of Carriage

	<b>MSB</b>	<b>25</b>	<b>E</b>	<b>SS</b>	<b>FC</b>	<b>N</b>	<b>A</b>
Series: <b>MSB</b>							
Size: <b>15, 20, 25, 30, 35</b>							
Carriage Type:							
(1) Medium Load							
<b>TE</b> : Flange type, mounting from top or bottom							
<b>TS</b> : Square type							
(2) Heavy Load							
<b>E</b> : Flange type, mounting from top or bottom							
<b>S</b> : Square type							
(3) Ultra Heavy Load							
<b>LS</b> : Square type							
Dust protection option: No symbol, <b>UU, SS, ZZ, DD, KK, LL, RR</b>							
Preload: <b>FC</b> (Light preload),							
Accuracy grade: <b>N, H</b>							
Code of special carriage: No symbol, <b>A, B ...</b>							

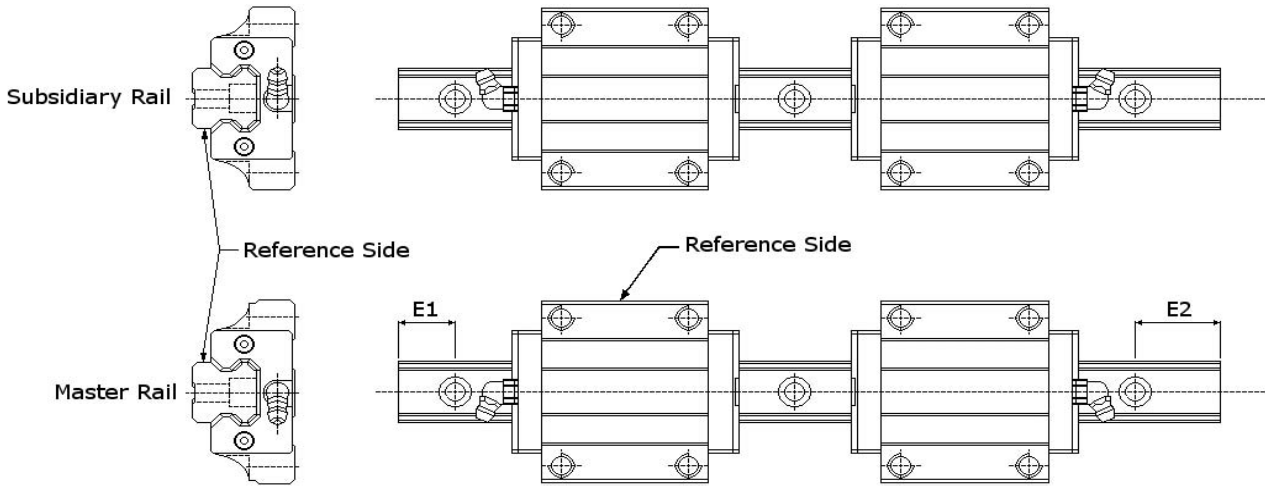

## Description of Specification (Interchangeable Type)

### Code of Rail

	<b>MSB</b>	<b>25</b>	<b>R</b>	<b>1200</b>	<b>-20</b>	<b>/40</b>	<b>N</b>	<b>A</b>
Series: <b>MSB</b>								
Size: <b>15, 20, 25, 30, 35</b>								
Rail type: <b>R, U<sup>(1)</sup></b> (Counter-bore type), <b>T</b> (Tapped hole type)								
Rail length (mm)								
Rail hole pitch from start side ( <b>E1</b> )								
Rail hole pitch to end side ( <b>E2</b> )								
Accuracy grade: <b>N, H</b>								
Code of special rail: No symbol, <b>A, B, ...</b>								

Note: <sup>(1)</sup> U type rail is only applicable for MSB15 with M4 mounting hole.