




SNL Plummer Block Housing for Self-Aligning Bearings Series 1600

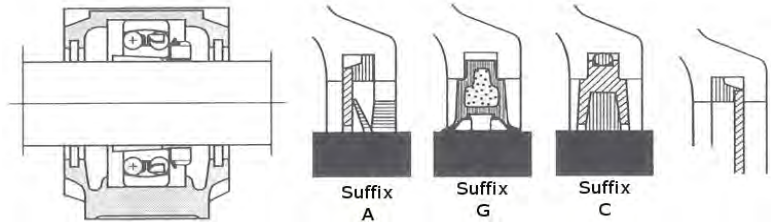

Shaft Dia	Basic Plummer Block Unit Designation	Separate Component Designations			Adapter Sleeve (& locknut)	Locating Ring(s)	End Cover
		Housing	Basic Seal	Bearing			
inch/mm							
3/4	SNH 1605E	SNH 506-605	TSNA 605	1305 K	HE 305	2xFRB 7,5/62 P	ASNA 506-605
20	SNH 1605	SNH 506-605	TSNA 605	1305 K	H 305	2xFRB 7,5/62 P	ASNA 506-605
25	SNH 1606	SNH 507-606	TSN 606	1306 K	H 306	2xFRB 7,5/72 P	ASNA 507-606
1	SNH 1606E	SNH 507-606	TSNA 606	1306 K	HE 306	2xFRB 7,5/72 P	ASNA 507-606
30	SNH 1607	SNH 508-607	TSNA 607	1307 K	H 307	2xFRB 9/80 P	ASNA 508-607
11/4	SNH 1608E	SNH 510-608	TSNA 608	1308 K	HE 308	2xFRB 9/90 P	ASNA 510-608
35	SNH 1608	SNH 510-608	TSNA 608	1308 K	H 308	2xFRB 9/90 P	ASNA 510-608
11/2	SNH 1809E	SNH 511-609	TSNA 609	1309 K	HE 309	2xFRB 9,5/100 P	ASNA 511-609
40	SNH 1609	SNH 511-609	TSNA 609	1309 K	H 309	2xFRB 9,5/100 P	ASNA 511-609
13/4	SNH 1610E	SNH 512-610	TSNA 610	1310K	HE 310	2xFRB 10,5/110 P	ASNA 512-610
45	SNH 1610	SNH 512-610	TSNA 610	1310K	H 310	2xFRB 10,5/110 P	ASNA 512-610
50	SNH 1611	SNH 513-611	TSNA 611	1311 K	H 311	2xFH 11/120 P	ASNA 513-611
2	SNH 1611E	SNH 513-611	TSNA 611	1311 K	HE 311	2xFRB 11/120 P	ASNA 513-611
55	SNH 1612	SNH 515-612	TSNA 612	1312K	H 312	2xFRB 12,5/130 P	ASNA 515-612
21/4	SNH 1613E	SNH 516-613	TSNA 613	1313K	HE 313	2xFRB 12,5/140 P	ASNA 516-613
60	SNH 1613	SNH 516-613	TSNA 613	1313K	H 313	2xFRB 12,5/140 P	ASNA 516-613
21/2	SNH 1615E	SNH 518-615	TSNA 615	1315 K	HE 315	2xFRB 14/160 P	ASNA 518-615
65	SNH 1615	SNH 518-615	TSNA 615	1315K	H 315	2xFRB 14/160 P	ASNA 518-615
23/4	SNH 1616E	SNH 519-616	TSNA 616	1316 K	HE 316	2xFRB 14,5/170 P	ASNA 519-616
70	SNH 1616	SNH 519-616	TSNA 616	1316 K	H 316	2xFRB 14,5/170 P	ASNA 519-616
75	SNH 1617	SNH 520-617	TSNA 617	1317K	H 317	2xFRB 14,5/180 P	ASNA 520-617
3	SNH 1617E	SNH 520-617	TSNA 617	1317K	HE 317	2xFRB 14,5/180 P	ASNA 520-617

For shaft diameters 1¼" & 1½" the basic seal designation suffix for V-ring seals is AE.

For shaft diameters 1¼", 1½", 2¼" & 3¼" the basic seal designation suffix for felt seals is CE.

For shaft diameters ¾", 1¼", 1½", 2¼", 3¼" & 3½" the basic seal designation suffix for double lip seals is GE.

If a dimension is critical to your application please contact our sales department for confirmation.

Please note : errors and omissions excepted.